



КАТАЛОГ ИНСТРУМЕНТ ДЛЯ АВТОМАТОВ ПРОДОЛЬНОГО ТОЧЕНИЯ


ДОПОЛНЕНИЕ

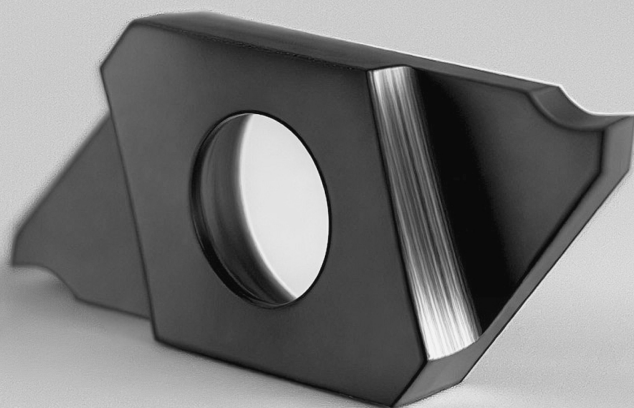

Система маркировки

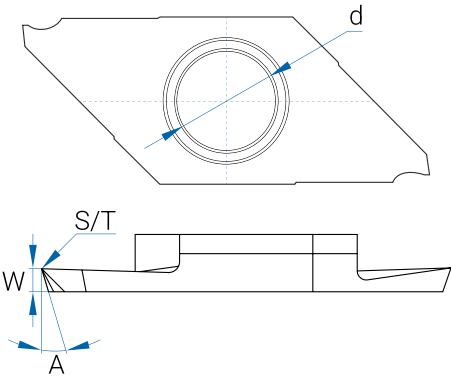

ПРИМЕР: TKF12R25050-16DR

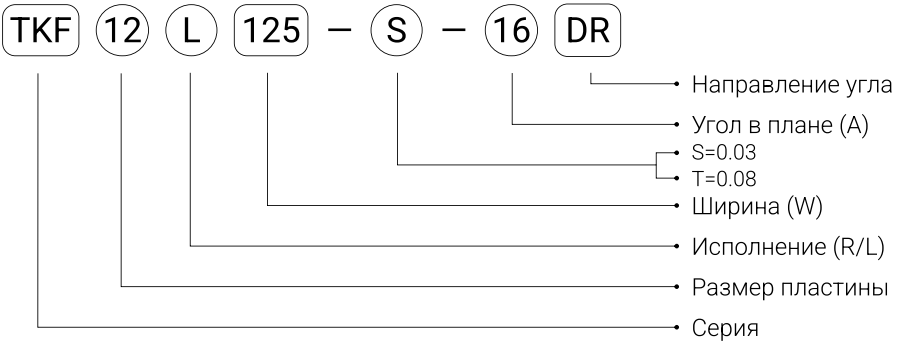

TKF12

Характеристики					
Наименование	W	Dmax	A	S/T	CU20E
TKF12R/L050-S	0.50	5.00	0°	0.03	●
TKF12R/L070-S	0.70	8.00	0°	0.03	●
TKF12R/L100-S	1.00	12.00	0°	0.03	●
TKF12R/L125-S	1.25	12.00	0°	0.03	●
TKF12R/L150-S	1.50	12.00	0°	0.03	●
TKF12R/L200-S	2.00	12.00	0°	0.03	●
TKF12R/L100-T	1.00	12.00	0°	0.08	●
TKF12R/L150-T	1.50	12.00	0°	0.08	●
TKF12R/L200-T	2.00	12.00	0°	0.08	●
TKF12R/L050-S-16DR	0.50	5.00	16°	0.03	●
TKF12R/L070-S-16DR	0.70	8.00	16°	0.03	●
TKF12R/L100-S-16DR	1.00	12.00	16°	0.03	●
TKF12R/L125-S-16DR	1.25	12.00	16°	0.03	●
TKF12R/L150-S-16DR	1.50	12.00	16°	0.03	●
TKF12R/L200-S-16DR	2.00	12.00	16°	0.03	●
TKF12R/L100-T-16DR	1.00	12.00	16°	0.08	●
TKF12R/L150-T-16DR	1.50	12.00	16°	0.08	●
TKF12R/L200-T-16DR	2.00	12.00	16°	0.08	●

Пример заказа: TKF12R150-S CU20E


TKF16

Характеристики					
Наименование	W	Dmax	A	S/T	CU20E
TKF16R/L150-T	1.50	16.00	0°	0.08	●
TKF16R/L200-T	2.00	16.00	0°	0.08	●
TKF16R/L150-S-16DR	1.50	16.00	16°	0.05	●
TKF16R/L200-S-16DR	2.00	16.00	16°	0.05	●
TKF16R/L150-S	1.50	16.00	16°	0.05	●
TKF16R/L200-S	2.00	16.00	16°	0.05	●
TKF16R/L150-T-16DR	1.50	16.00	16°	0.08	●
TKF16R/L200-T-16DR	2.00	16.00	16°	0.08	●


Пример заказа: TKF16L150-T-16DR CU20E



Система маркировки

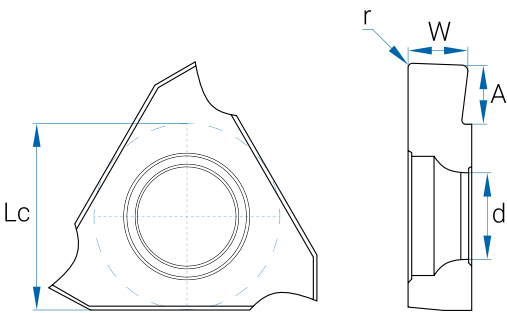

ПРИМЕР: TGF22R115-005

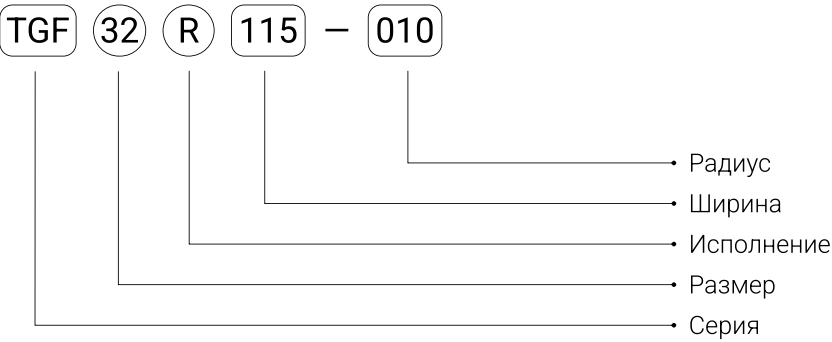

TGF

Характеристики						
Наименование	W	Amax	Lc	d	r	CU20E
TGF32R/L033-005	0.33	0.80	9.525	4.4	0.05	●
TGF32R/L050-005	0.50	1.20	9.525	4.4	0.05	●
TGF32R/L075-010	0.75	2.00	9.525	4.4	0.1	●
TGF32R/L095-010	0.95	2.00	9.525	4.4	0.1	●
TGF32R/L100-010	1.00	2.00	9.525	4.4	0.1	●
TGF32R/L110-010	1.10	2.00	9.525	4.4	0.1	●
TGF32R/L125-010	1.25	2.00	9.525	4.4	0.1	●
TGF32R/L145-010	1.45	2.50	9.525	4.4	0.1	●
TGF32R/L150-010	1.50	2.50	9.525	4.4	0.1	●
TGF32R/L175-010	1.75	2.50	9.525	4.4	0.1	●
TGF32R/L185-010	1.85	2.50	9.525	4.4	0.1	●
TGF32R/L200-010	2.00	2.50	9.525	4.4	0.1	●
TGF32R/L250-010	2.50	2.50	9.525	4.4	0.1	●
TGF32R/L300-010	3.00	2.50	9.525	4.4	0.1	●

Пример заказа: TGF32R125-010 CU20E

GBA

Характеристики						
Наименование	W	Amax	Lc	d	r	CU20E
GBA43R/L125-010	1.25	2.00	12.7	4.4	0.1	●
GBA43R/L125-020	1.25	2.00	12.7	4.4	0.2	●
GBA43R/L150-010	1.50	3.50	12.7	4.4	0.1	●
GBA43R/L150-020	1.50	3.50	12.7	4.4	0.2	●
GBA43R/L200-010	2.00	3.50	12.7	4.4	0.1	●
GBA43R/L250-020	2.50	3.50	12.7	4.4	0.2	●
GBA43R/L250-010	2.50	4.00	12.7	4.4	0.1	●
GBA43R/L250-020	2.50	4.00	12.7	4.4	0.2	●
GBA43R/L300-010	3.00	4.00	12.7	4.4	0.1	●
GBA43R/L300-020	3.00	4.00	12.7	4.4	0.2	●

Пример заказа: GBA43R200-010 CU20E

